

# Video door entry for the professional



## Enterview 2

Video Door Entry Systems



## Enterview 2 V

Vandal Resistant  
Video Door Entry Systems

Modern aesthetics, reliability and flexibility of use were key requirements during the design stage of the new Enterview2. We're very pleased with the results and are sure you will be too. The Enterview2 can be installed with up to three slave monitor answer points and a memory module which allows recording of visitors in the users absence (see reverse). Available in two versions standard and vandal resistant the Enterview2 is a clear choice for your video door entry product requirements.

### Be the best - install the best...


**Elite Security Products** Unit 7, Levis Trading Estate,  
Station Road, Stechford, Birmingham B33 9AE.

Tel: 0121 789 8111 Fax: 0121 603 0436

E-mail: [info@espuk.com](mailto:info@espuk.com) Website: [www.espuk.com](http://www.espuk.com)



# Interview 2 / 2V Video Door Entry Systems

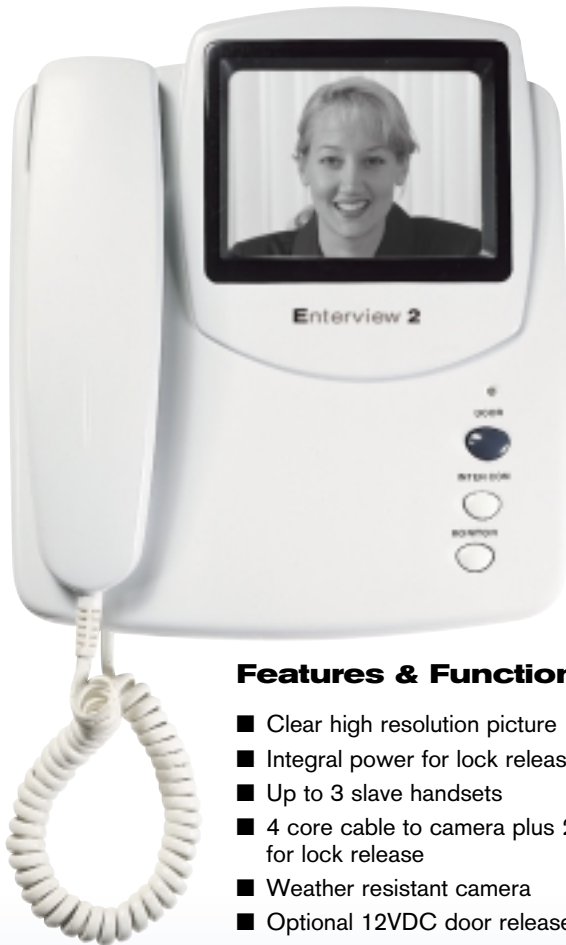

**Interview 2**



**Interview 2V**

## Features & Functions

- Clear high resolution picture
- Integral power for lock release
- Up to 3 slave handsets
- 4 core cable to camera plus 2 core for lock release
- Weather resistant camera
- Optional 12VDC door release available


## Camera

Image sensor	1/3" B/W CCD
Min illumination	0.1 Lux
Illumination	Infrared LED
Lens	Pin hole lens
IRIS system	Electronic automatic
Viewing angle	Horizontal 74° Vertical 55°
Voice transmission	Simultaneous conversion via speaker
Power source	DC 12V (+ 1V) from Monitor
Assurance temp.	-10°C--+50°C (14°F-122°F)
Cabinet	Interview 2 Plastic Interview 2V Metal
Weight	450g

## Monitor

Power source	AC 90V-250V
Picture	Flat CRT - 4"
TV system	B/W Optional EIA or CCIR
Resolution	More than 200 lines
Call signal sound	Electronic Chime bell
Wiring	2 Wire in polarity
Max wiring distance	0.55 wire 50m
Voice transmission	Hands set transmission
Assurance temp.	-10°C--+50°C (14°F-122°F)
Cabinet colour	White
Weight	2.10Kg

## INTERVIEW SAMPLE SYSTEM

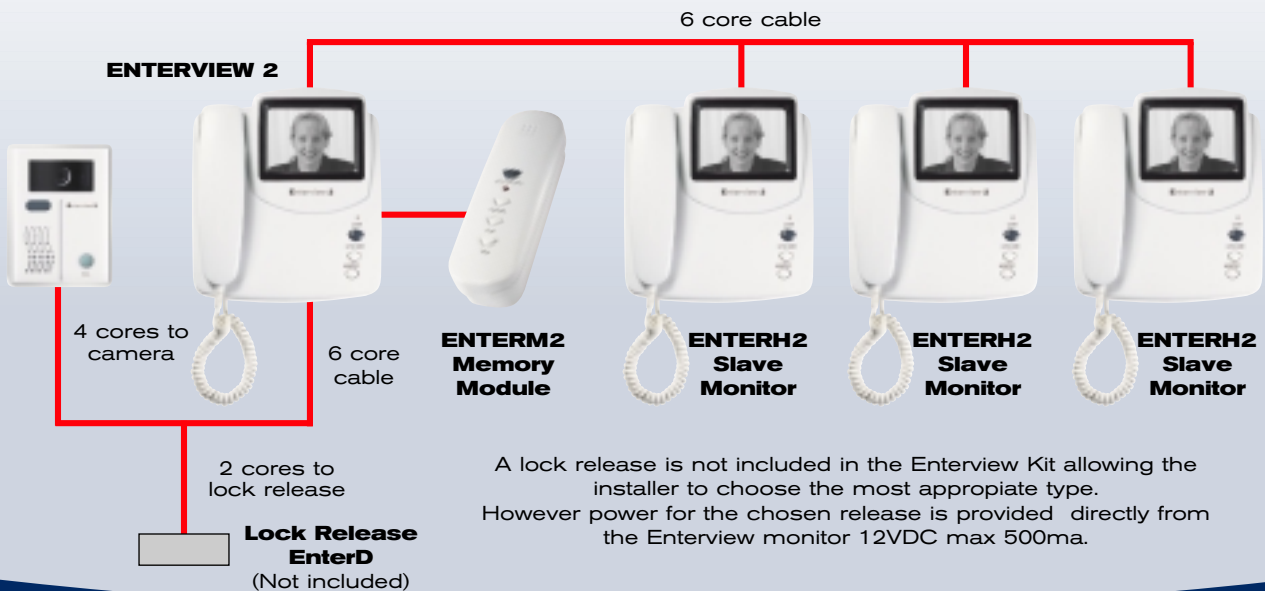

## Optional Accessories



- ENTERH2**  
Additional slave handset monitor for Interview 2/2V.
- Up to 3 per system
  - Connects via 6 core cable



- ENTERM2**
- Records visitors in your absence
  - Manual Record facility
  - 32 frame recording capability
  - Simple plug-in connection



- SURF 1**
- Optional surface mounting kit for Interview 2V camera
- SURF 1A**
- 20° angled version of SURF1

