

Odyssey 3

PROTECTION GUARANTEED



Texecom's *Odyssey*[™] external sounder & strobe series has been further enhanced by the addition of the stunning *Odyssey 3*. Environmentally sealed microprocessor technology, twin piezo sounders and triple tamper protection ensure uncompromising performance. Competitively priced and easy to install, the *Odyssey 3* is the clear choice for all professional installations.

Outstanding features include:

- ✓ 115dB VOLUME
- ✓ IP65 SEALED ELECTRONICS
- ✓ PATENTED SAFETY ENGINEER HOLD-OFF MODE
- ✓ ADVANCED MICROPROCESSOR TECHNOLOGY
- ✓ REVOLUTIONARY SCREW RETENTION SYSTEM[†]
- ✓ POLYCARBONATE CONSTRUCTION
- ✓ SELECTABLE SAB/SCB MODE
- ✓ SCREW, LID & WALL TAMPER
- ✓ TWIN ALTERNATING LEDs
- ✓ STROBE TUBE SAVER




[†] Worldwide patents pending.
Odyssey is a trademark of Texecom Ltd. (ODY3.EU2)


Texecom

www.texe.com


ODYSSEY 3

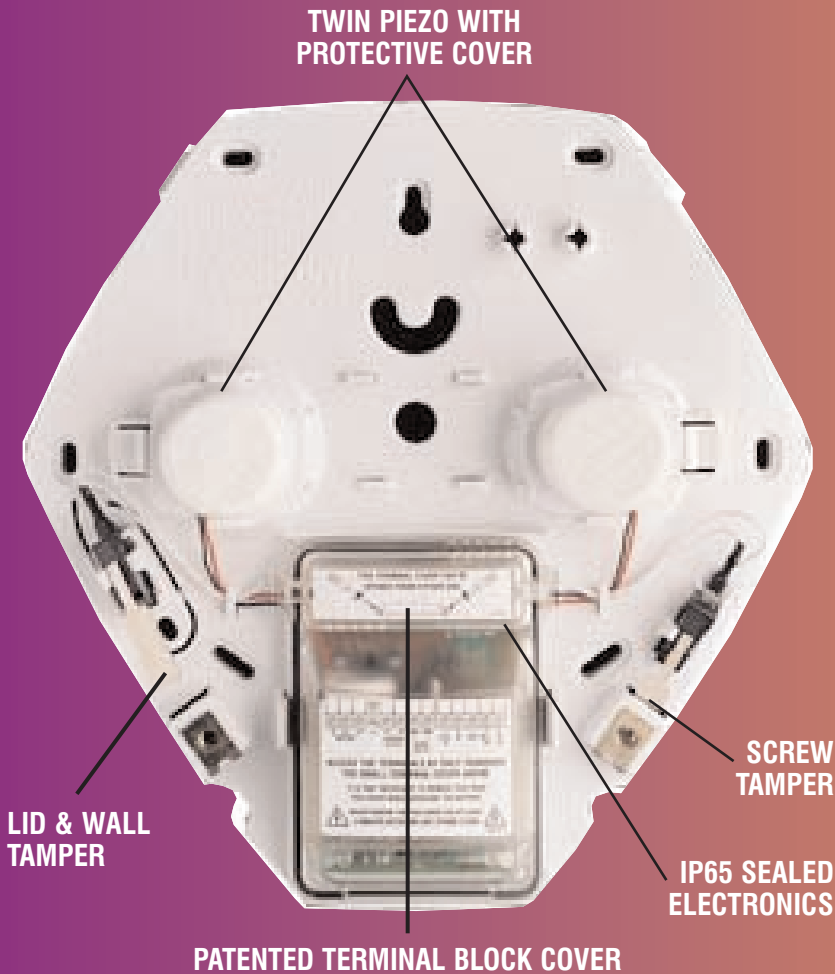

Odyssey 3

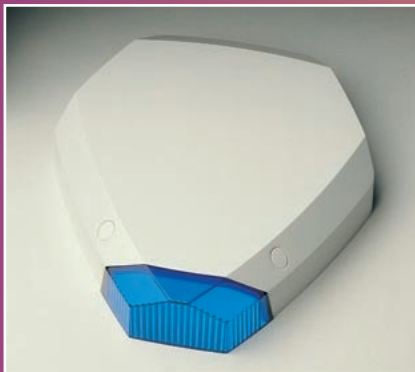

Odyssey 2

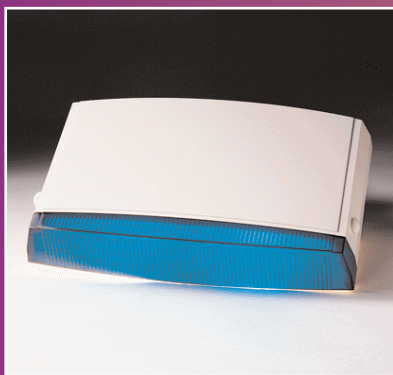

Odyssey 1



Odyssey E Series also available on all models (single piezo).

SPECIFICATION

ELECTRICAL

Supply Voltage 12Vdc (nominal).

Current Drain (typical at 12Vdc):

Quiescent (inc. charging) 18mA.

Strobe 120mA.

Single Piezo 300mA.

Twin Piezo 425mA.

Standby Battery:

Type Nicad Stack.

Voltage 7.2Vdc (nominal).

Capacity 280mAh.

Strobe:

Flash Tube 1Ws.

Flash Rate 1Hz (typical).

Discharge Time ($\leq 60V$) ≤ 180 seconds.

Comfort LEDs:

Brightness (at 12V) 100mcd (typical).

Flash Rate (tamper secure) 1Hz alternating (typical).

ENVIRONMENTAL

Volume (at 13.7V) 115dB at 1m (A Weighting, 90°).
109dB Economy version.

Cut-off Time ≤ 15 min.

Water-Proof Coating Conformal.

Operating Temperature -25°C (-13°F) to +55°C (+131°F).

Storage Temperature -25°C (-13°F) to +60°C (+140°F).

EMC Environment Residential/Commercial/Light Industrial or Industrial.

PHYSICAL

Tamper Detection Wall, lid and screw.

Economy version: lid and wall.

Mounting Corner mounting points plus central keyhole.

Orientation Vertical.

Material 3mm polycarbonate.

Dimensions 315mm x 306mm x 78mm
(12.40" x 12.04" x 3.07").

Packed Weight 1250g (44oz) approx.

Colours Available Cover: white, orange, red.

Lens: white, blue, red.

STANDARDS

Safety Conforms to European Union (EU) Low Voltage Directive (LVD) 73/23/EEC (amended by 93/68/EEC).

EMC Conforms to European Union (EU) Electro-Magnetic Compatibility (EMC) Directive 89/336/EEC (amended by 92/31/EEC and 93/68/EEC).

BEST MANUFACTURER 1999
INTRUDER ALARM
MANUFACTURER OF THE
YEAR 2000

1st For offering the best quality products at the right prices

1st For reliability and responsiveness

1st For excellence in customer care & service

1st For providing a high level of support & servicing including training & help lines



Certificate Number: FM 35285

EASEM

BSIA
British Security Industry Association



ODY3 EUZ